

PROPERTIES	SPECIFIED VALUES AS PER IS:2046-1995 TYPE S, HGS	CONFIRMS
Resistance to Surface wear	FP 350 (Min. Revolutions)	610 Revolutions
Resistance to immersion in boiling water		
- Mass increase (%)	10.00% (Maximum)	5.7% Max
- Thickness increase (%)	12% (Maximum)	6.8% Max
- Appearance.	Not worse than 4	Passes
Resistance to Dry heart 180°C	Not worse than 3	Passes
Gloss/other	Not worse than 4	Passes
Dimensional Stability at 20°C		
- Longitudinal (%)	0.375% (Maximum)	0.284%
- Transverse (%)	0.60% (Maximum)	0.526%
Dimensional Stability at deviated temperature		
- Longitudinal (%)	0.55% (Maximum)	0.47%
- Transverse (%)	1.025% (Maximum)	0.92%
Resistance to scratching	2.0 N (Maximum)	2.95 N
Resistance to steam	Not worse than 4	Passes
Resistance to impact by small diameter ball	20 N (Maximum)	35 N
Resistance to cigarette burns	Not worse than 3	Passes
Resistance to cracking	Not worse than 4	Passes
Resistance to Staining		
- Group 1 & 2	Not worse than 5	Passes
- Group 3 & 4	Not worse than 4	Passes
Resistance to color change (Wool standard)		
- In xenon arc light	Not worse than 6	Passes
- In enclosed carbon arc light	Not worse than 5	Passes
Apperance	Free From ABC Defects	Free From ABC Defects

- Our Products are free from manufacturing defects and perfectly fit for use under normal conditions. In case of any claims, the liability of the company is however limited to the cost of the product only.
- ORDERS FOR CUSTOM - MADE SHEETS WILL BE ACCEPTED FOR BULK QUANTITY
- AVAILABLE SIZE : 1225 X 2445mm
- Kindly check the actual laminate before finalizing, as printing colour may differ due to printing limitations

INSTALLATION, CARE AND MAINTENANCE GUIDELINE

- Avoid direct sunlight /continuous light from laminates, these may cause to colour fading
- Extra care required in vertical pasting of HPL sheet as there is possibility of bubbles due to lack of uniform pressure
- Cracking at corners & around cuts may be caused by improper conditioning, Improper bonding or poor planning. Avoid all these to prevent cracking at corners.
- Do not use chemicals for cleaning surface




LIÊN HỆ VỚI CHÚNG TÔI

- 📍 34 Đặng Thúc Vịnh, Xã Đông Thạnh, Thành phố Hồ Chí Minh
- ✉ info@mdfthaile.com
- ☎ (028) 37110532 - 37110620 - 37113175
- 🌐 www.mdfthaile.com

Technical

SPECIFICATIONS

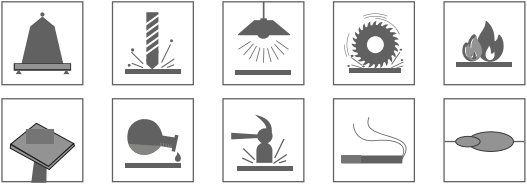

LAMINATE by THÁI LÊ

LAMINATE

by THÁI LÊ

Vol 2



NATURAL BRIGHT OAK
8197 MT



DARK BROWN WALNUT
8324 MT



TRAVERTINE STONE
8355 TMG



ƯU ĐIỂM VÀ ĐẶC TÍNH NỔI BẬT CỦA TẤM LAMINATE THÁI LÊ

Tấm Laminat Thái Lê sở hữu bề mặt bền đẹp, chống trầy xước, chống bám bẩn và chịu nhiệt hiệu quả, đáp ứng tốt các yêu cầu sử dụng trong nội thất hiện đại. Sản phẩm được sản xuất từ nguyên liệu an toàn, không chứa formaldehyde hay các hợp chất độc hại, thân thiện với môi trường và an toàn cho người sử dụng.

Với bảng màu đa dạng từ đơn sắc hiện đại, vân gỗ tự nhiên đến hiệu ứng vải và kim loại, tấm Laminat Thái Lê mang đến giải pháp thẩm mỹ cao cho nhiều không gian cao cấp. Đồng thời, sản phẩm có thể ứng dụng linh hoạt trên nhiều loại cốt ván trên thị trường, phù hợp cho cả công trình dân dụng lẫn thương mại.



Độ Dày
0.5mm



Chống
Trầy Xước




Đa Dạng
Phong Cách



Thân Thiện
Môi Trường



NATURAL TEAK
8365 SF

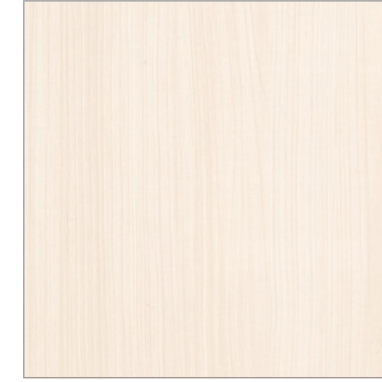

LIGHT CREAM ASH
8639 SF



NATURAL BEIGE ASH
8381 SF



AMERICAN WALNUT
8363 SF



NATURAL BEIGE OAK
8612 SF



RUSTIC BRIGHT OAK
8629 SF



RUSTIC BROWN TEAK
8167 SF



WARM BROWN WALNUT
8377 SF



NATURAL MAPLE
8641 SF



DARK HONEY TEAK
8630 SF




SMOKED GREY OAK
8635 SF




GREIGE ASH
8642 SF



SILKY MATTE - SIÊU MỊN



WHITE SILKY MATT
5702 SMT



LIGHT GREY SILKY MATT
5781 SMT



WARM BEIGE SILKY MATT
5741 SMT



WARM GREY SILKY MATT
5750 SMT



DARK GREY SILKY MATT
5777 SMT




GREIGE SILKY MATT
5782 SMT




HIGH GLOSSY - SIÊU BÓNG



PURE WHITE HIGH GLOSSY
5701 HGS

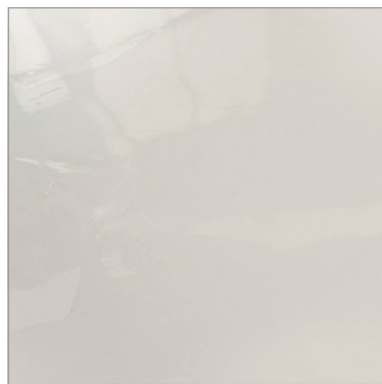


IVORY HIGH GLOSSY
5704 HGS

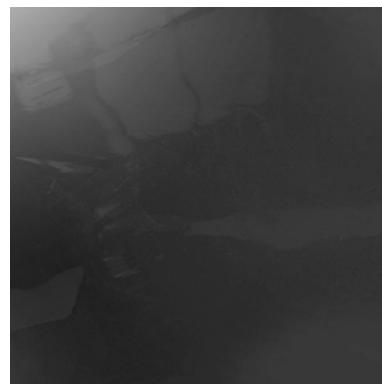

CHARCOAL HIGH GLOSSY
5722 HGS



NỆP CHỈ ĐỒNG MÀU

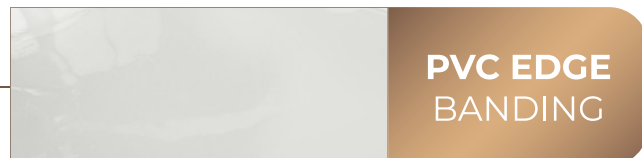

**PVC EDGE
BANDING**

