PROPERTIES	SPECIFIED VALUES AS PER IS:2046-1995 TYPE S, HGS	CONFIRMS
Resistance to Surface wear	FP 350 (Min. Revolutions)	610 Revolutions
Resistance to immersion in boiling water		
- Mass increase (%)	10.00% (Maximum)	5.7% Max
- Thickness increase (%)	12% (Maximum)	6.8% Max
- Appearance.	Not worse than 4	Passes
Resistance to Dry heart 180°C	Not worse than 3	Passes
Gloss/other	Not worse than 4	Passes
Dimensional Stability at 20°C		
- Longitudinal (%)	0.375% (Maximum)	0.284%
- Transverse (%)	0.60% (Maximum)	0.526%
Dimensional Stability at deviated temperature		
- Longitudinal (%)	0.55% (Maximum)	0.47%
- Transverse (%)	1.025% (Maximum)	0.92%
Resistance to scratching	2.0 N (Maximum)	2.95 N
Resistance to steam	Not worse than 4	Passes
Resistance to impact by small diameter ball	20 N (Maximum)	35 N
Resistance to cigarette burns	Not worse than 3	Passes
Resistance to cracking	Not worse than 4	Passes
Resistance to Staining		
- Group 1 & 2	Not worse than 5	Passes
- Group 3 & 4	Not worse than 4	Passes
Resistance to color change (Wool standard)		
- In xenon arc light	Not worse than 6	Passes
- In enclosed carbon arc light	Not worse than 5	Passes
Apperance	Free From ABC Defects	Free From ABC Defects

- Our Products are free from manufacturing defects and perfectly fit for use under normal conditions. In case of any claims, the liability of the company is however limited to the cost of the product only.
- ORDERS FOR CUSTOM - MADE SHEETS WILL BE ACCEPTED FOR BULK QUANTITY
- AVAILABLE SIZE : 1225 X 2445mm
- Kindly check the actual laminate before finalizing, as printing colour may differ due to printing limitations

INSTALLATION, CARE AND MAINTENANCE GUIDELINE

- Avoid direct sunlight /continuous light from laminates, these may cause to colour fading
- Extra care required in vertical pasting of HPL sheet as there is possibility of bubbles due to lack of uniform pressure
- Cracking at corners & around cuts may be caused by improper conditioning, Improper bonding or poor planning. Avoid all these to prevent cracking at corners.
- Do not use chemicals for cleaning surface



Technical SPECIFICATIONS

CHAT WITH US

LIÊN HỆ VỚI CHÚNG TÔI

34 Đặng Thúc Vịnh, Đông Thạnh, Thành phố Hồ Chí Minh
info@mdfthaile.com
(028) 37110532 - 37110620 - 37113175
www.mdfthaile.com

LAMINATE *by* THÁI LÊ

LAMINATE

by THÁI LÊ

Vol 2



NATURAL BRIGHT OAK
8197 MT



DARK BROWN WALNUT
8324 MT




IVORY CLOUD TRAVERTINE
8355 TMG

ƯU ĐIỂM VÀ ĐẶC TÍNH NỔI BẬT CỦA TẤM LAMINATE THÁI LÊ

Tấm Laminate Thái Lê sở hữu bề mặt bền đẹp, chống trầy xước, chống bám bẩn và chịu nhiệt hiệu quả, đáp ứng tốt các yêu cầu sử dụng trong nội thất hiện đại. Sản phẩm được sản xuất từ nguyên liệu an toàn, không chứa formaldehyde hay các hợp chất độc hại, thân thiện với môi trường và an toàn cho người sử dụng.

Với bảng màu đa dạng từ đơn sắc hiện đại, vân gỗ tự nhiên đến hiệu ứng vải và kim loại, tấm Laminate Thái Lê mang đến giải pháp thẩm mỹ cao cho nhiều không gian cao cấp. Đồng thời, sản phẩm có thể ứng dụng linh hoạt trên nhiều loại cốt ván trên thị trường, phù hợp cho cả công trình dân dụng lẫn thương mại.

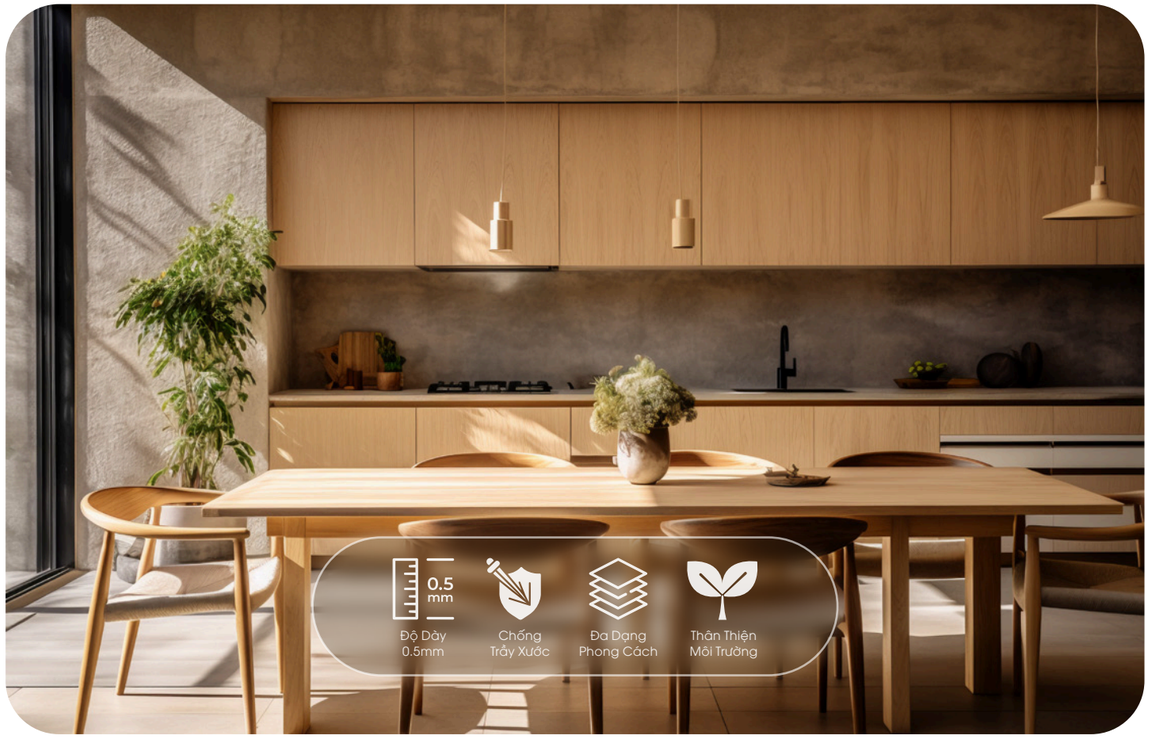

1225 x 2445mm

LAMINATE by THÁI LÊ

THÁI LÊ
better interior panels

VÂN GỖ CAO CẤP



NATURAL TEAK
8365 SF



LIGHT CREAM ASH
8639 SF



NATURAL BEIGE ASH
8381 SF



AMERICAN WALNUT
8363 SF



NATURAL BEIGE OAK
8612 SF



RUSTIC BRIGHT OAK
8629 SF



RUSTIC BROWN TEAK
8167 SF



WARM BROWN WALNUT
8377 SF



NATURAL MAPLE
8641 SF



DARK HONEY TEAK
8630 SF



SMOKED GREY OAK
8635 SF



GREIGE ASH
8642 SF

1225 x 2445mm

www.mdfthaile.com

THÁI LÊ
better interior panels

ĐƠN SẮC CAO CẤP

SILKY MATTE - SIÊU MỊN

WHITE SILKY MATT
5702 SMT

LIGHT GREY SILKY MATT
5781 SMT

WARM BEIGE SILKY MATT
5741 SMT

WARM GREY SILKY MATT
5750 SMT

DARK GREY SILKY MATT
5777 SMT

GREIGE SILKY MATT
5782 SMT

HIGH GLOSSY - SIÊU BÓNG

PURE WHITE HIGH GLOSSY
5701 HGS

IVORY HIGH GLOSSY
5704 HGS

CHARCOAL HIGH GLOSSY
5722 HGS

NẸP CHỈ ĐỒNG MÀU

PVC EDGE
BANDING

1225 x 2445mm

www.mdfthaile.com

LAMINATE *by* THÁI LÊ

